


IntePro[®] Triple Wall

IntePro Triple Wall is durable, lightweight, and long-lasting. It is sturdier than single- or double-wall varieties, with a longer lifespan. It can withstand extensive use without significant wear or damage to the product.

Like its counterparts, IntePro Triple Wall is resistant to moisture, water, and temperature fluctuations. The most common application is for use in brick weep holes, allowing air to circulate and release moisture, while preventing pest entry.

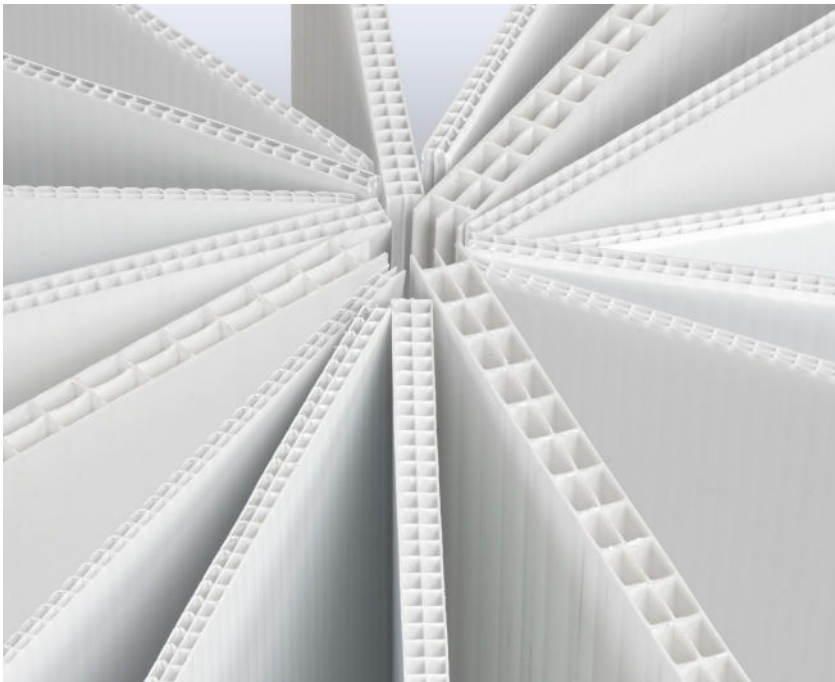

Features & Benefits

- Durable and strong
- Lightweight
- Weather resistant
- Long-lasting
- Eco-friendly
- Customizable
- Cost effective
- Easy installation
- Variety of thicknesses available
- Variety of colors available

Thickness

- 4 mm
- 5 mm
- 6 mm
- 8 mm
- 10 mm
- 13 mm



Specifications

Width

Standard Sheet

- $\pm 1/8$ "

Square Cut Sheet

- $-1/16$ " to $+1/8$ "

Length

Standard Sheet

- 96": 0" to +1"

Square Cut Sheet

- 96": $\pm 1/4$ "

Squareness

(difference between diagonals)

Length of Standard Sheet

- 96": $\leq 1/2$ "

Length of Square Cut Sheet

- 96": $\leq 3/16$ "

Thickness

- $\pm 5\%$

Surface Treatment

- > 46 dyne/cm (4 mm)

Straightness

Length of IntePro is 96"

- If the ratio of Length to Width is 0 to ≤ 4 , the Tolerance is $\leq 3/16$ "

Warp


(highest point of the sheet when place on a flat surface)

Length of IntePro is 96"

- If the Width is 48", the Tolerance is $< 3/4$ "

Shipment Quantity

- -0% to + 5%

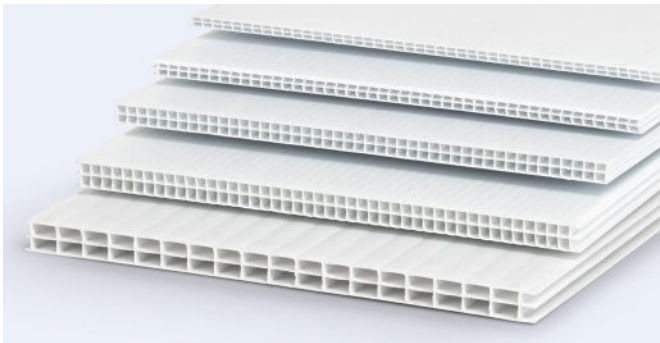

For additional information, please visit www.inteplast.com/products/corrugated-boards

TEL: 1-800-452-2117 (x1)
intepro@inteplast.com
www.inteplast.com

OFFICE: 9 Peach Tree Hill Rd., Livingston, NJ 07039
PLANT: 101 Inteplast Blvd., Lolita, TX 77971

Triple Wall Feb 2025